


## Cloud Setup & Cell Activation

(For faster setup, we recommend doing this step first)


1. Register or login to your account at: [www.ControlByWeb.cloud](http://www.ControlByWeb.cloud)
2. Choose 'Devices' from the left navigation bar and click 'New Device'.
3. On the New Device page, select the 'Cell Device' tab.
4. Enter a device name, the last 6 digits of serial number, and the Cell ID (located on the side of the device) and click 'Submit'.
5. You'll be redirected to the Device Edit page. \*Click 'Activate SIM Card'.
6. Once activated, power up the X-404C.  
May take up to 5 minutes to connect.

*\*Note: If data plan was purchased separately, first enter Data Plan Code (sent via email) & click 'Apply Data Plan'. Activation may take 15 minutes. Click 'Check SIM Status' to verify activation.*

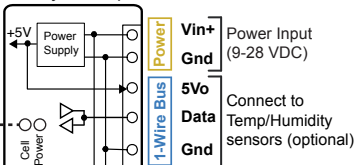

### Antenna SMA Connector

**+Vo** Vout to sensors = Vin  
**Gnd** Ground  
**Gnd** Ground  
**D(B)** D(B)  
**D(A)** D(A)

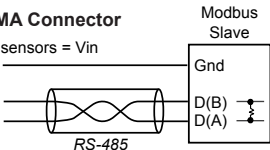

... Indicator Light: Blinking = Connecting, Solid = Connected

See users manual for setup instructions:

[www.ControlByWeb.com/support/](http://www.ControlByWeb.com/support/)

## LAN Setup Steps (Optional)

1. Power the module and connect to network.
2. Set IP address on computer to be on the same network as the module. (Example: Set computer to 192.168.1.50)
3. To configure the module, open a web browser and enter:  
`http://192.168.1.2/setup.html`
4. Assign permanent IP address to module, then restart module.
5. Restore computer's IP address, if necessary, and access the module at its new IP address to finish setup.

## Factory Default Settings

**IP Address:** 192.168.1.2

**Subnet Mask:** 255.255.255.0

**Control Page Web Address:** `http://192.168.1.2`

**Control Password:** *(no password set)*

**Setup Page Web Address:** `http://192.168.1.2/setup.html`

**Setup Username:** admin

**Setup Password:** webrelay *(all lower case)*



[www.ControlByWeb.com](http://www.ControlByWeb.com)

1681 West 2960 South, Nibley, UT 84321, USA