

0 1 2 3 4 5

A

A

B

B

C


C

D

D

E

E

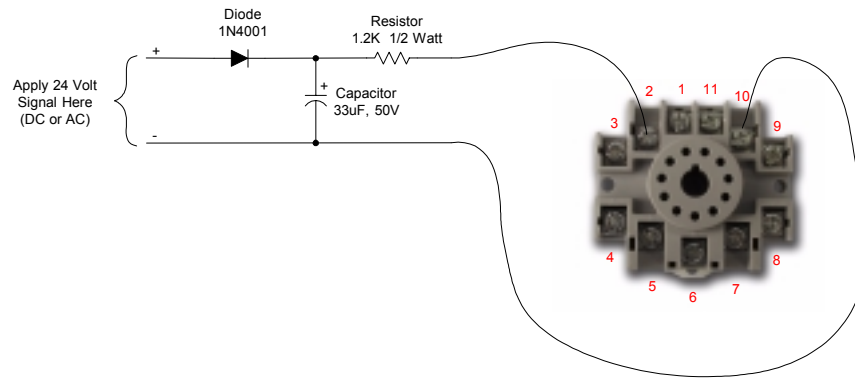

Note:
 AC signals and signals
 greater than 12V can be
 applied to the input of
 WebRelay using a signal
 conditioner. This circuit
 can be used for both DC
 and AC signals around
 24V.



Xytronix Research & Design, Inc.
 1488 East 2300 North
 North Logan, UT 84341
 (435) 750-5999

Title: Signal Conditioner Circuit		Size: A
Hierarchy ID:		Revision: 1.0
Project Name:		Drawing ID: 24v-sc.vsd
Engineer: dwtbeck	Design Date:	Sheet: 1 of 1
Drawn by:	Last Modified: Jun 1, 2006	

This document contains information that is confidential and proprietary to Xytronix Research & Design, Inc. No part of this document or its contents may be copied, disclosed, or used in any way without written consent from Xytronix Research & Design, Inc. This is an unpublished work protected under Federal Copyright laws.

0 1 2 3 4 5