

0 1 2 3 4 5

A

A

B

B

C


C

D

D


E

E

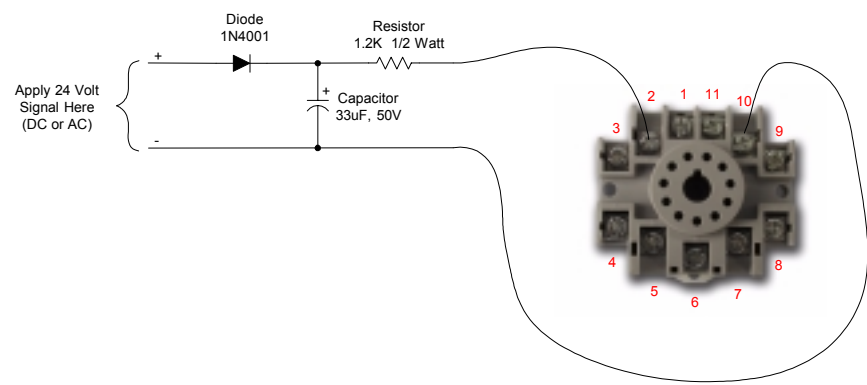

Note:
 AC signals and signals greater than 12V can be applied to the input of WebRelay using a signal conditioner. This circuit can be used for both DC and AC signals around 24V.

This document contains information that is confidential and proprietary to Xytronix Research & Design, Inc. No part of this document or its contents may be copied, disclosed, or used in any way without written consent from Xytronix Research & Design, Inc. This is an unpublished work protected under Federal Copyright laws.

		Xytronix Research & Design, Inc. 1488 East 2300 North North Logan, UT 84341 (435) 750-5999	
Title: Signal Conditioner Circuit		Size: A	
Hierarchy ID:		Revision: 1.0	
Project Name:		Drawing ID: 24v-sc.vsd	
Engineer: dwtbeck		Sheet: 1 of 1	
Design Date:		Last Modified: Jun 1, 2006	
Drawn by:			

0 1 2 3 4 5